

Ca7 RJ45 Toolless Plug


OEM customization, various colors and logos



BT459815

RJ45 Connector (8P8C) With Tail Clips


The tail clips design RJ45 connectors for Cat.7A larger cable from 22-26 AWG, providing wire hole 1.2mm, 1.5mm and 1.6mm to fit with the different kinds of solid cables. We offer silver and golden plated, all are Shielded (STP) RJ45 Connector supporting 10 gigabits Ethernet Networking.

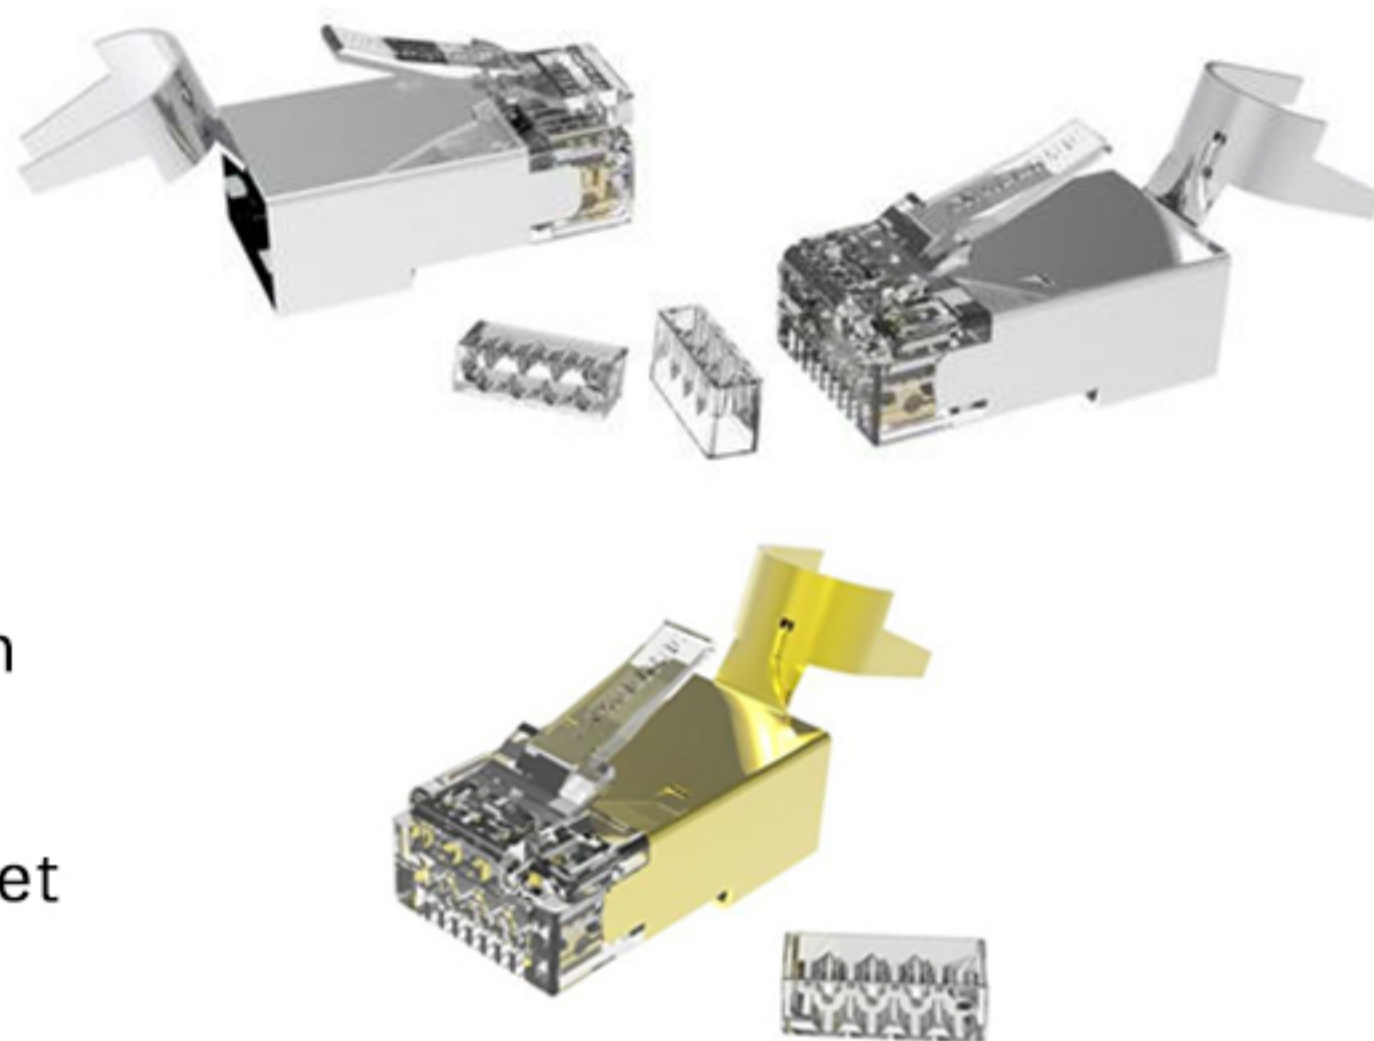


Internet Speed Ratio

Type	Max.Data Rate (Ethernet)	Max. Frequency	Channel length	Cabling UTP/STP	Connector
Cat.8.1	40Gbps	2GHz	30m	STP	RJ45
Cat.8.2	40Gbps	2GHz	30m	STP	Non RJ45
Cat.7A	10Gbit/s	1GHz	100m	STP	Non RJ45
Cat.7	10Gbit/s	600 MHz	100m	both	Non RJ45
Cat.6A	10Gbit/s	500 MHz	100m	both	RJ45
Cat.6	1 Gbit/s	250 MHz	100m	both	RJ45
Cat.5E	1 Gbit/s	100 MHz	100m	both	RJ45


Operating

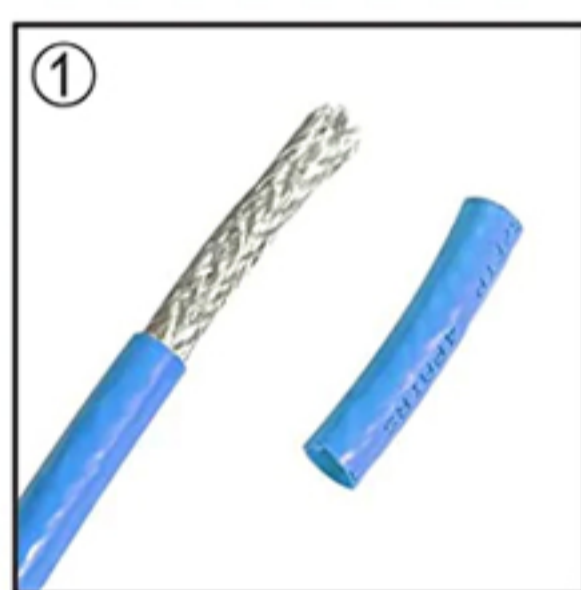

① Strip the cable jacket about 3cm

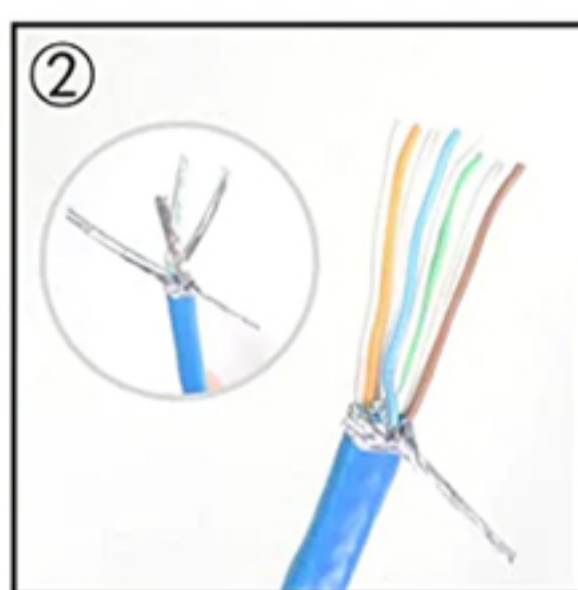


② Cut the extra braid, aluminum foil and PET off

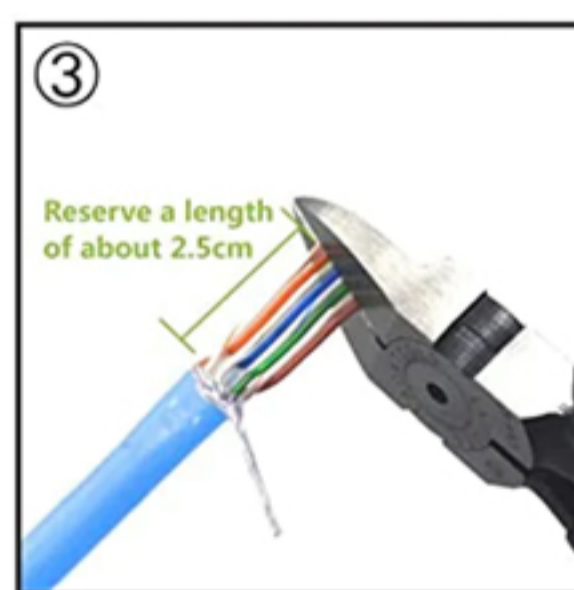


③ Cut the wires to 2.5cm long



④ Place the wires in T568A or T568B order

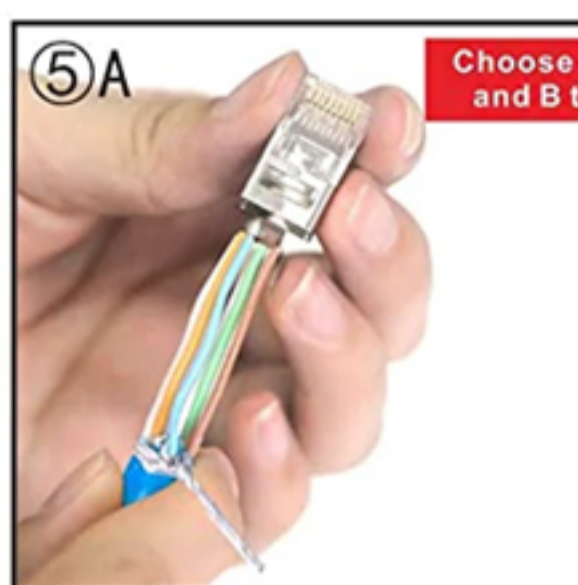

⑤A: Insert the wires into the RJ45 connector

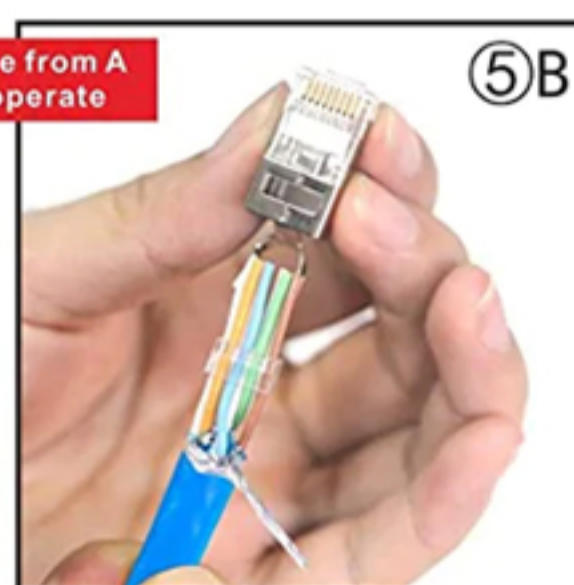

⑤B: Thread the wires through the load bar, assemble plug



⑥ Crimp the plug



⑦ Crimp fix buckle



⑧ Complete



QUESTIONS?CALL US TODAY
+86-769 81271686

✉ sales@dgsfangbei.cn

🌐 <https://dgsfangbei.en.alibaba.com>



Building 1, No. 396 Dalingshan Avenue,
Dalingshan Town, Dongguan, Guangdong

